



**SBS**  
*SBS Technology*

**SMOKE DENSITY MONITOR**



# Robust Technology & Versatile Design



Optic head with fiber-optic cable

The SBS<sub>1000</sub> Smoke Density Monitor is a particular robust system that is well suited to resist heat and vibrations in and around smoke stacks. Our patented technology removes the light source from the smoke stack contrary to competing technology. Instead, the infrared LED is placed in the monitor cabinet and the light beam brought to the smoke stack via robust optic fibers. The lenses of the optic heads are kept clean with purge air.

These features reduce the requirements for maintenance and especially spare parts to a bare minimum. Green Instruments (former SBS Technology) was the first to make use of this design to the highest satisfaction of the users.

This robustness is combined with a high flexibility which means that the G<sub>1000</sub> Smoke Density Monitor can be installed in very diverse settings. The small monitoring unit can be placed almost anywhere. It provides you with two alarm relays and an analog signal that can be adapted to your special needs.

The optional G<sub>1900</sub> Smoke Emission Monitoring System allows you to integrate measurements from various stacks.

## Key Features

- ⌚ **Avoid image damaging black smoke**
- ⌚ **Avoid investigations, fines, and delays**
- ⌚ **Satisfy EPA and other authorities**
- ⌚ **Documentation compliant with Visible Smoke Control Area regulation**
- ⌚ **For combustion monitoring and optimization**
- ⌚ **In-situ and real-time measurement**
- ⌚ **Simple auditing**
- ⌚ **Durable and robust design**
- ⌚ **Temperature and vibration resistant optic heads**
- ⌚ **Two freely configurable alarm relays**
- ⌚ **Analog output signal (4...20 mA or 0...10 V)**
- ⌚ **Cost effective**
- ⌚ **Easy to install – easy to configure**
- ⌚ **Low maintenance**
- ⌚ **Worldwide customer support via service partners**



# Benefits to Economy and Environment



Easy lens cleaning



An installation of a G1000 Smoke Density Monitor with the monitoring unit and one optic head

Port authorities and regional authorities around the world – but especially in North America – are to increasing degrees regulating emissions from ships as well as from industrial plants. Although legislation is varying, regulations in North America would typically rule that ships may not emit smoke with an opacity of more than 20% for more than 3 minutes. A similar limit is set for shipboard incinerators by IMO.

Installing a SBS<sub>1000</sub> Smoke Density Monitor will help you check and document compliance with environmental standards. This will avoid fines, time-consuming investigations, and costly delays. The cost of installing a SBS<sub>1000</sub> Smoke Density Monitor is marginal compared to a single fine. Monitoring the emissions of your ships will also contribute positively to your image as environmentally responsible company. Especially black smoke has the potential of severely harming that image.

But the economic benefit has a wider range. By controlling the combustion, your crew and personnel is better equipped to detect faulty operation at an early stage and thus optimize operation and maintenance. This is especially important for avoiding soot contamination of inert gas.

# Specifications

Lloyd's Register

TYPE APPROVAL

## Monitoring Unit incl. Digital Display:

Power Supply	standard 210–250 V AC – 50/60 Hz – 12 VA max. — optional 105–130 V AC or 20–30 V DC
Ambient temperature	0°C – 55°C
Dimensions / Weight	H×W×D: 300 × 200 × 150 mm / 5.5 kg (monitoring unit alone)
Enclosure	IP 65 Steel box
Display	0...100% opacity level (programmable)
Output signals (linearized)	4...20 mA (4 mA ≈ 100% – 20 mA ≈ 0% Opacity) max. 800 Ω or 0...10 V DC (0 V ≈ 100% – 10 V ≈ 0% Opacity) max. 10 mA
Alarm delay	default 5 s (programmable 0–99 s)
Relay function	2 relays, volt free, freely configurable — default NC — max. 250 V AC, max. 2A
Default alarm levels	Relay 1 at 20% opacity (= Ringelman 1) and Relay 2 at 30% opacit

## Fiber-Optic Cables:

Optic fibers	glass-fiber core in stainless steel sheathings with brass end tip
Operating temperature	max. 240°C at the glass fiber tip behind the lenses – up to 500°C in the stack
Length of cables	standard 4.5 m – optional 6.0 m, 7.5 m, or others


## Optic Heads with Purge-Air System:

Welding sockets	Zi34×200 mm (Ø×L) – sockets aligned opposite of each other
Scanning distance	1 m to 3 m – for shorter ranges one lens need to be removed or replaced
Head Housing	H×W×D: < 120 × 100 × 60 mm – stainless steel – with purge-air connector
Purge Air Supply	10 NLPM – i.e. 5 NLPM for each head

## Optional Equipment

- SBS<sub>1900</sub> Smoke Emission Monitoring System
- Welding & Adjustment Bracket for easy mounting
- Audit Filter Pens
- Purge air blower — Filter-regulator for purge air
- Alarm Annunciator for panel mounting
- Visualization and data logging
- Data-system integration via various busses such as RS485 and CAN

Specifications subject to changes without notice

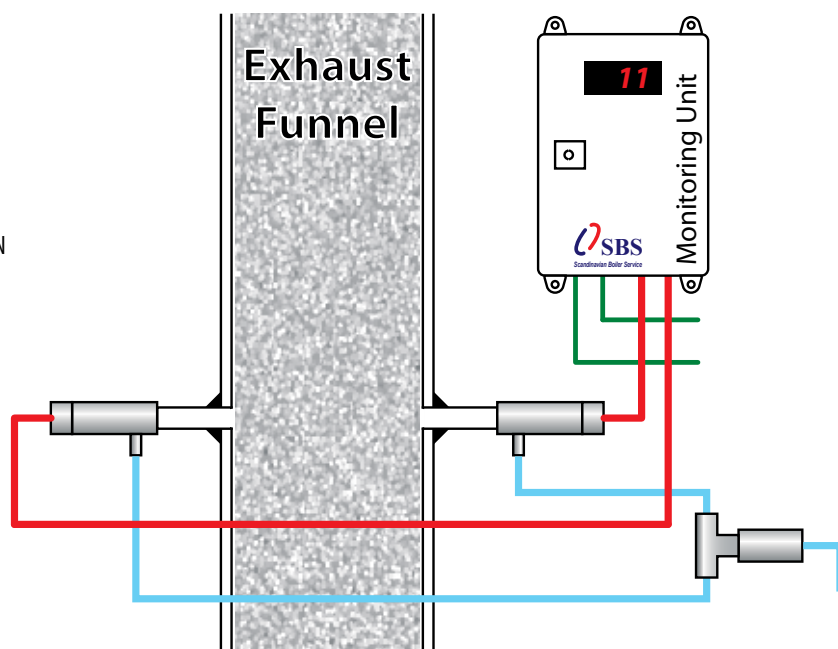

### EUROPE

Scandinavian Boiler Service  
Denmark  
Tel.: +45 7027 1000  
Email: sbs@sbs-eu.com

### AMERICA

Scandinavian Boiler Service  
Ft. Lauderdale USA  
Tel.: +1 954 763 7375  
Email: sbs@sbs-us.com



### ASIA

Scandinavian Boiler Service  
Singapore  
Tel.: +65 6767 0200  
Email: sbs@sbs-asia.com

### MIDDLE EAST

Scandinavian Boiler Service  
Dubai  
Tel.: +971 4 340 2110  
Email: dubai@sbs-industries.com